



TCR OPEN TYPE

For installation information please refer to the tooling overview and manuals on our website www.scell-it.com
 Pour les conditions de pose, merci de vous référer à la description de l'outil et aux manuels disponibles sur notre site web.
 Angaben zur Verarbeitung entnehmen Sie bitte der Geräteübersicht und den Betriebsanleitungen auf unserer Website.
 Pro informace ohledně montáže navštivte naše webové stránky nebo nahlédněte do manuálu k nářadí.



TCR-FICHE

ENGLISH	FRANÇAIS	DEUTSCH	CZECH
Insert / Knurled	Ecrou / Cranté	Einnietmutter / Gerillt	nýtovací matice / s rýhovaným dřikem
Reduced countersunk head	Tête réduite à 90°	Kleiner senkkopf	redukovaná hlava
Steel + zinc plated	Acier zingué	Stahl	ocel

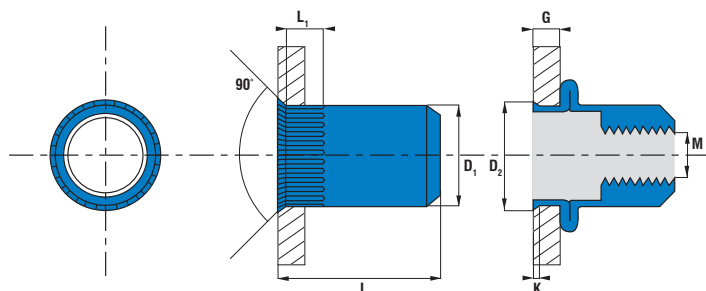

PART NO/REF	M	D ₁	D ₂	K	L	L ₁	G
	Ø (mm)	Ø (mm)	Ø (mm)	(mm)	(mm)	(mm)	min-max (mm)
TCR0430	M4	5.9	7.0	0.6	10.0	4.0	0.5-3.0
TCR0530	M5	6.9	8.0	0.6	11.5	4.0	0.5-3.0
TCR0630	M6	8.9	10.0	0.6	14.0	4.0	0.5-3.0
TCR0830	M8	10.9	12.0	0.6	15.5	4.0	0.5-3.0
TCR1035	M10	12.9	13.5	0.8	19.5	4.5	0.8-3.5

	DRILLING	RECOMMENDED MAX TORQUE	PULL-OUT	SHEAR
M (mm)	(mm)	(Nm)	(N)	(N)
M4	6.0	4.0	6 600	1 600
M5	7.0	5.0	9 200	2 200
M6	9.0	15.0	17 000	2 400
M8	11.0	18.0	22 000	2 900
M10	13.0	30.0	32 400	4 300

UNIT PLANT CERTIFICATES



ISO 9001:2000
 ISO 14001
 TS 16949

Scell-it®
 Engineering & Development

© 2009 Blue future Intellectual Proterities

Data shown are subject to change without prior notice as a result of continuous product development and improvement policy.
 Your local Scell-it representative is at your disposal should you need to confirm latest information.